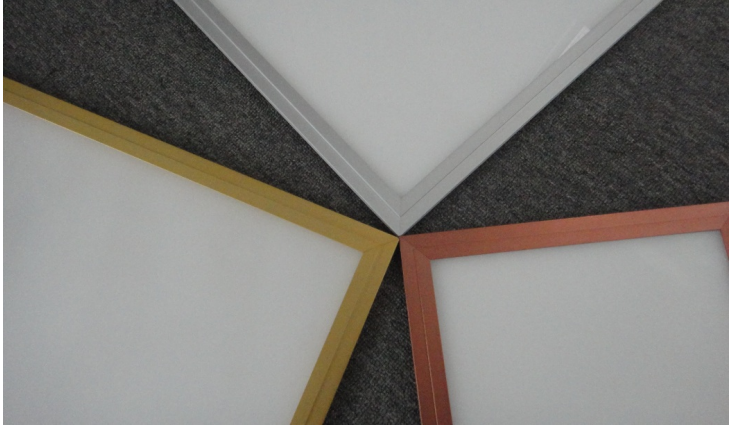


LY-66-R2 600 x 600 LED PANEL

Fluorescent Troffer Replacement

FEATURES		PHOTO	
<ul style="list-style-type: none"> > Warranty 3 years > Power Saving 50% + > Life Cycle 50,000 hrs. > Instant On No warm up time > Non-Flicker > High Uniformity Uniform light distribution > No UV No-UV or IR light emitted, does not attract insects > Low Heat Less Heat than fluorescent tubes leading to savings in A/C costs > No mercury Contains no toxic Mercury > Architectural Design Slimline attractive design > Maintenance Free > Remote Control Optional remote control > Dimmable Optional dim function > Application Commercial Buildings, Schools, Hospitals, Retail Shops, Laboratories, Galleries 			
SPECIFICATIONS		VERSIONS	
<ul style="list-style-type: none"> > Voltage Range AC 100-240V > Beam Angle 160 deg > Operating Temp neg 10 to 40 deg C > Storage Temp neg 20 to 40 deg C > Operating Humidity 10-80% > Weight 4.7kgs > Size 595 x 595 x 12mm > IK Rating IK04 > IP Rating IP41 > Fixing Methods Recessed Surface Mount (Optional) Suspended (Optional) Warm White > Colour Temp Pure White Cool White 		<ul style="list-style-type: none"> > LY-66A-R2 <ul style="list-style-type: none"> Power 28W LED Qty 360pcs Lumens 1800-200lm > LY-66B-R2 <ul style="list-style-type: none"> Power 50W LED Qty 720pcs Lumens 3500-4200lm > LY-66C-R2 <ul style="list-style-type: none"> Power 88W LED Qty 1080pcs Lumens 4000-4500lm 	

Lightsense Australia Pty Ltd

TEL 1300 944 822 EML info@lightsense.com.au

WEB www.lightsense.com.au ADD PO Box 613, West Perth WA 6872