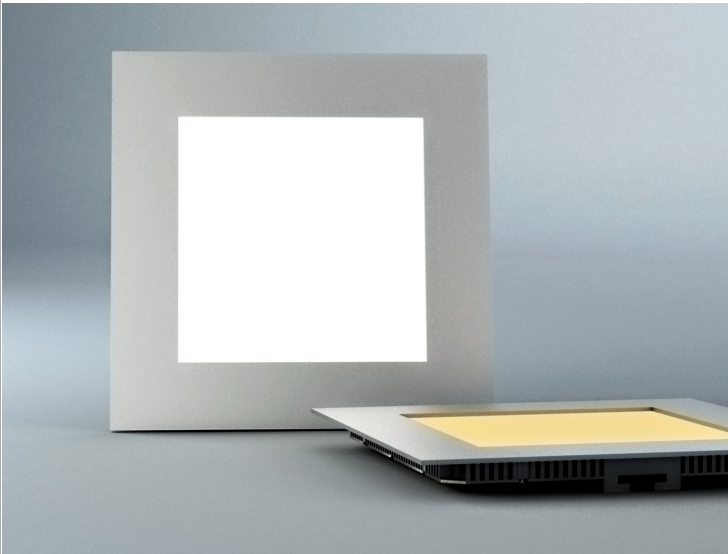


## LY-S SQUARE LED PANEL LIGHT

Fluorescent Down light Replacement

FEATURES		PHOTO	
<ul style="list-style-type: none"> <li>&gt; <b>Warranty</b> 3 years</li> <li>&gt; <b>Power Saving</b> &gt; 50%</li> <li>&gt; <b>Life Cycle</b> 50,000 hrs.</li> <li>&gt; <b>Instant On</b> No warm up time</li> <li>&gt; <b>Non-Flicker</b> No flicker effect that causes fatigue</li> <li>&gt; <b>High Uniformity</b> Uniform light distribution</li> <li>&gt; <b>No UV</b> No-UV or IR light emitted, does not attract insects</li> <li>&gt; <b>Low Heat</b> Low heat than fluorescent leading to savings in A/C costs</li> <li>&gt; <b>No mercury</b> Contains no toxic mercury, lead or other hazardous materials</li> <li>&gt; <b>Architectural Design</b> Slimline attractive design</li> <li>&gt; <b>Maintenance Free</b></li> <li>&gt; <b>Dimmable</b> Dimmable</li> <li>&gt; <b>Application</b> Commercial Buildings, Schools, Hospitals, Retail Shops, Laboratories, Galleries</li> </ul>			
SPECIFICATIONS		VERSIONS	
<ul style="list-style-type: none"> <li>&gt; <b>Input Voltage</b> 24V DC</li> <li>&gt; <b>Operating Temp</b> neg 10 to 40 deg C</li> <li>&gt; <b>Storage Temp</b> neg 20 to 60 deg C</li> <li>&gt; <b>Operating Humidity</b> 10-80%</li> <li>&gt; <b>IK Rating</b> IK04</li> <li>&gt; <b>IP Rating</b> IP41</li> <li>&gt; <b>Fixing Methods</b> Recessed Surface Mount (Optional) Suspended (Optional)</li> <li>&gt; <b>Colour Temp</b> 2700-3300K (Warm White) 4000-5000K (Pure White) 5500-7000K (Cool White)</li> </ul>		<ul style="list-style-type: none"> <li>&gt; <b>LY-S100-1W</b> <ul style="list-style-type: none"> <li>Size 100 x 100 x 19mm</li> <li>Power 1W</li> <li>Lumens 60-100lm</li> </ul> </li> <li>&gt; <b>LY-S184-7W</b> <ul style="list-style-type: none"> <li>Size 184 x 184 x 19mm</li> <li>Power 7W</li> <li>Lumens 380-450lm</li> </ul> </li> <li>&gt; <b>LY-S184-10W</b> <ul style="list-style-type: none"> <li>Size 184 x 184 x 19mm</li> <li>Power 10W</li> <li>Lumens 420-560lm</li> </ul> </li> <li>&gt; <b>LY-S200-7W</b> <ul style="list-style-type: none"> <li>Size 200 x 200 x 19mm</li> <li>Power 7W</li> <li>Lumens 380-450lm</li> </ul> </li> <li>&gt; <b>LY-S200-10W</b> <ul style="list-style-type: none"> <li>Size 200 x 200 x 19mm</li> <li>Power 10W</li> <li>Lumens 420-560lm</li> </ul> </li> </ul>	

Lightsense Australia Pty Ltd

TEL 1300 944 822 EML [info@lightsense.com.au](mailto:info@lightsense.com.au)

WEB [www.lightsense.com.au](http://www.lightsense.com.au) ADD PO Box 613, West Perth WA 6872